

TTR-1D43-227

Connectorized high speed VCSEL with monitor PD

FEATURES:

- Pre-aligned SC-type receptacle for 50/125um multi-mode fiber communication.
- Data rate operation from DC to 2.5Gbps.
- Operation temperature range -10°C ~ 85°C.
- Common anode(-227)



ELECTRO-OPTICAL CHARACTERISTICS:

PARAMETERS	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
Threshold Current	I_{th}		1.5	2.5	mA	
Forward Voltage	V_F	1.6	1.8	2.1	V	$I_F=6\text{ mA}$
Series Resistance	R_s	30	45	60	Ω	$I_F=6\text{ mA}$
Slope Efficiency	η	0.05	0.08	0.12	mW/mA	$I_F=6\text{ mA}$
Wavelength	λ_p	830	850	860	nm	$I_F=6\text{ mA}$ ⁽³⁾
Rise/Fall Time	t_r/t_f			0.15	ns	$I_F=6\text{ mA}$
Spectral width (RMS)	$\Delta\lambda$			0.85	nm	$I_F=6\text{ mA}$
Relative Intensity Noise	RIN		-130	-120	dB/Hz	$I@6\text{ mA}, f=1\text{ GHz}$
PD Monitor Current	I_M	200		800	μA	$V_R=5\text{ V}, P_{OC}=350\mu\text{W}^{(2)}$
PD Dark Current	I_d			20	nA	$V_r=5\text{ V}$
PD Capacitance	C_M		12		pF	$V_{rm}=0\text{ V}$

Notes:

1. All parameters except mentioned are measured at $I_F=6\text{ mA}$, 25°C, CW.
2. P_{OC} =Coupled Optical Power, be measured with a multi-mode 50/125 μm fiber and ambient temperature 25°C.
3. Minimum and Maximum values are valid over the entire ambient temperature range.

THERMAL CHARACTERISTICS:

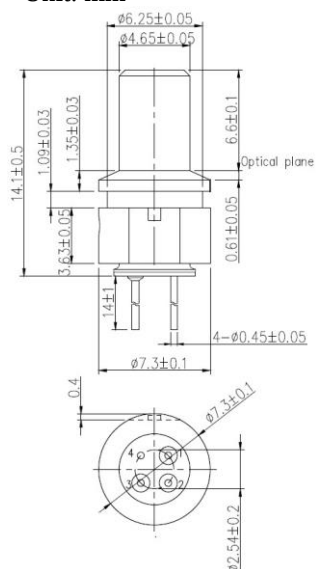
PARAMETERS	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITIONS
I_{th} Temperature Variation	ΔI_{th}	-1.5		2	mA	$T_A=0\sim 70^\circ\text{C}$
η Temperature Coefficient	$\Delta\eta/\Delta T$	-0.6	-0.25		%/°C	$T_A=0\sim 70^\circ\text{C}$, $I_F=6\text{ mA}$
λ_p Temperature Coefficient	$\Delta\lambda_p/\Delta T$		0.06		nm/°C	$T_A=0\sim 70^\circ\text{C}$, $I_F=6\text{ mA}$

ABSOLUTE MAXIMUM RATINGS:

PARAMETERS	MIN	MAX	UNIT	TEST CONDITIONS
Storage Temperature	-40	100	°C	
Operating Temperature	-10	85	°C	
Lead Solder Temperature		260	°C	10 seconds
Continuous Forward Current		20	mA	
Continuous Reverse Voltage		10	V	

OUTLINE DIMENSIONS:

• Unit: mm

**Pinout:**

Pin Number	TTR-1D43-227
	Function
1	VCSEL Cathode
2	VCSEL Anode/ PD Cathode
3	PD Anode
4	Case

WARNING:

The VCSEL is a class 1M laser in the safety standard IEC60825-1:2014 and do not expose users of telescopic optics.

